

SUNTUF® Rooflights Data Sheet

Profile: 7250




02/04/2019

Product Description:

- SUNTUF Co-extruded UV protection on one side.
- SUNTUF UV2 Co-extruded UV protection on two sides.

Profile drawing:

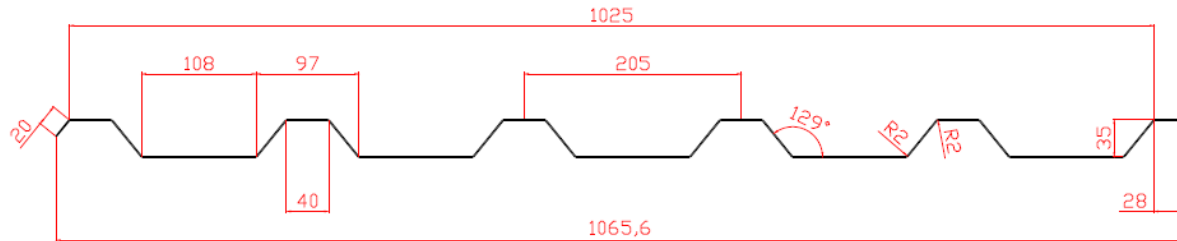

General properties:

Profile (mm)	Thickness (mm)	Length (m)	Overall width (mm)	Cover Width (mm)	Side-Lap (%)
250/35	1.0-1.5	1.5 - 11.6	1065.5	1025	3.8

Load / Span Data

Maximum Roof Span (mm)						
Load (kg/m ²)	1.0 mm		1.2 mm		1.5 mm	
	End Span	Mid Span	End Span	Mid Span	End Span	Mid Span
75	1125	1500	1200	1600	1310	1750
100	1050	1400	1090	1450	1200	1600
125	975	1300	1010	1350	1090	1450
150	900	1200	975	1300	1050	1400
175	860	1150	900	1200	975	1300
200	825	1100	860	1150	940	1250

- The specified dimensions do not supersede the requirements of local construction codes.
- The given spans are according to deflections criterion of L/20, and minimum slope of 10%.
- The maximum roof spans are based on calculation model and practical testing.
- The mentioned load refers to wind and snow load only.
- For vertical application spans can be increased by 10%.

SUNTUF® Rooflights Data Sheet

Profile: 7250



02/04/2019

Curved roof

- Minimum curving radius – 14 m.

Typical Properties

Property	Standard	Conditions	Unit	Value
Density	ASTM D792	-	g/cm ³	1.2
Heat Deflection Temperature	ASTM D648	1.82 MPa	°C	130
Service Temperature (Short term) Service Temperature (Long term)	-	-	°C	-50 to 120 -50 to 100
Coefficient of Linear Thermal Expansion	ASTM D696	-	cm/cm °C	6.5 X 10 ⁻⁵
Thermal Conductivity	ASTM C177	-	W/mK	0.21
Tensile Strength at Yield	ASTM D638	10 mm/min	MPa	62
Tensile Strength at Break	ASTM D638	10 mm/min	MPa	65
Elongation at Yield	ASTM D638	10 mm/min	%	7
Elongation at Break	ASTM D638	10 mm/min	%	>80
Tensile Modulus of Elasticity	ASTM D638	10 mm/min	MPa	2300
Flexural Strength	ASTM D790	1.3 mm/min	MPa	93
Flexural Modulus	ASTM D790	1.3 mm/min	MPa	1890
Impact Falling Weight (E-50)	ISO 6603/1		J	50
Rockwell Hardness	ASTM D785		R Scale	118R
Light Transmission	ASTM D1003		%	90
Haze	ASTM D1003		%	<0.5
Yellowness Index	ASTM D1925			<1

*Please refer to Technical guide for more details.