

SUNTUF® Rooflights Data Sheet


Profile: G115 / 17 - 153



Product Description:

- SUNTUF Co-extruded UV protection on one side.
- SUNTUF UV2 Co-extruded UV protection on two sides.

Profile drawing:

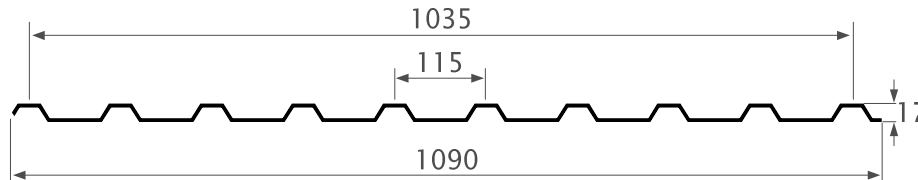

General properties:

Dimension	Value
Thickness (Avg.)	0.9mm to 1.5mm
Length	1.5m to 11.9m
Cover Width	1035mm
Profile height	17mm

Load / Span Data:

Load (kg/m ²)	Maximum Roof Span (mm)				
	0.9 mm	1.0 mm	1.1 mm	1.2 mm	1.5 mm
75	1000	1050	1100	1150	1250
100	950	1000	1050	1100	1200
125	900	950	1000	1050	1150
150	850	900	950	1000	1100
200	650	700	725	750	800
250	600	650	675	700	725

- The specified dimensions do not supersede the requirements of local construction codes.
- The maximum purlin spans are based on continuous beam calculation model and practical testing.
- The criterion for allowed deflections is L/20.
- The mentioned load refers to both wind and snow loads.
- Minimum recommended slope – 10%.
- For vertical application spans can be increased by 10%.
- For end field and single-span rooflights spans should be decreased by 25%.

SUNTUF® Rooflights Data Sheet

Profile: G115 / 17 - 153



Typical Properties

Property	Standard	Conditions	Unit	Value
Density	ASTM D792	-	g/cm ³	1.2
Heat Deflection Temperature	ASTM D648	1.82 MPa	°C	130
Service Temperature (Short term)	-	-	°C	-50 to 120
Service Temperature (Long term)	-	-	-	-50 to 100
Coefficient of Linear Thermal Expansion	ASTM D696	-	cm/cm °C	6.5 X 10 ⁻⁵
Thermal Conductivity	ASTM C177	-	W/mK	0.21
Tensile Strength at Yield	ASTM D638	10 mm/min	MPa	62
Tensile Strength at Break	ASTM D638	10 mm/min	MPa	65
Elongation at Yield	ASTM D638	10 mm/min	%	7
Elongation at Break	ASTM D638	10 mm/min	%	>80
Tensile Modulus of Elasticity	ASTM D638	10 mm/min	MPa	2300
Flexural Strength	ASTM D790	1.3 mm/min	MPa	93
Flexural Modulus	ASTM D790	1.3 mm/min	MPa	1890
Impact Falling Weight (E-50)	ISO 6603/1		J	50
Rockwell Hardness	ASTM D785		R Scale	118R
Light Transmission	ASTM D1003		%	90
Haze	ASTM D1003		%	<0.5
Yellowness Index	ASTM D1925			<1

*Please refer to Technical guide for more details.